



Jumper Installation

⚠ WARNING - ALWAYS MAKE SURE THE INPUT POWER IS COMPLETELY DISCONNECTED BEFORE ATTEMPTING ANY TROUBLESHOOTING PROCEDURES. ALL TROUBLESHOOTING SHOULD BE DONE BY A QUALIFIED PROFESSIONAL.


1) Remove 6 screws from Control Module and move the front cover to the side.

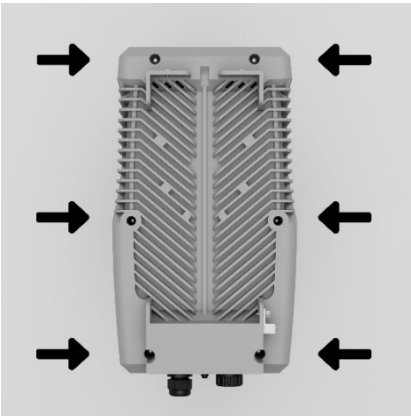

2) Locate Small Jumper Block

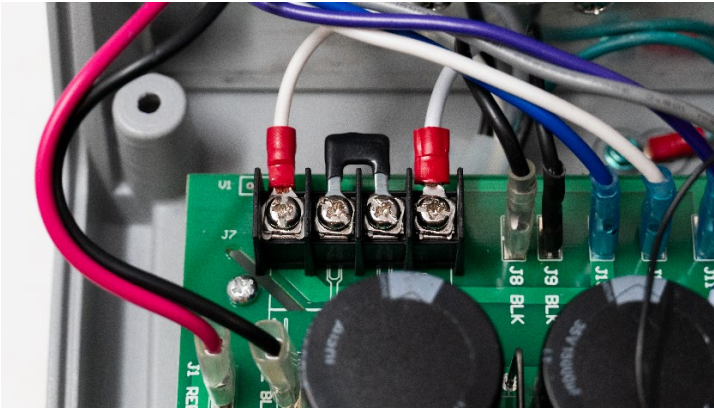


3) Loosen all four screw terminals, remove wires, and remove the existing jumper.

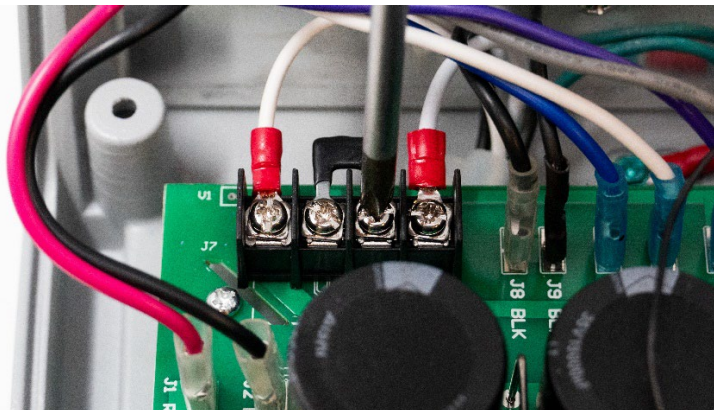

4) Locate the additional JUMPER inside the mounting bracket bag.



5) Reattach the wires on top of the provided JUMPER along with the original JUMPER onto the four screw terminals and tighten the screws to secure the jumpers along with the wire.

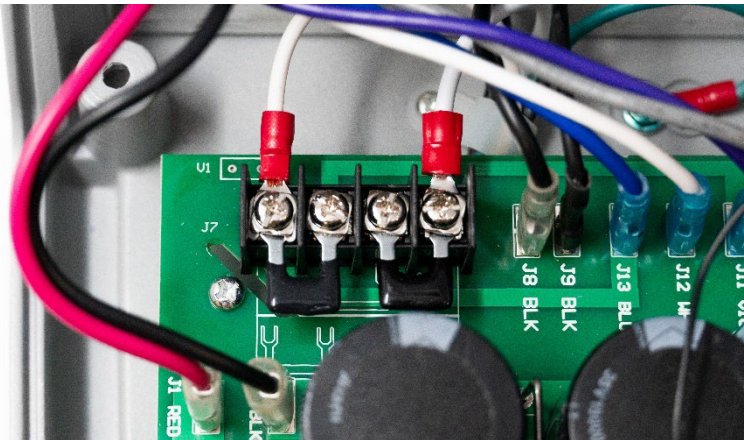

6) Reconnect the ribbon cables from step 1.

7) Attach the front cover to the control module and fasten the 6 screws from step 1.