


## Jumper Installation

**⚠ WARNING** - ALWAYS MAKE SURE THE INPUT POWER IS COMPLETELY DISCONNECTED BEFORE ATTEMPTING ANY TROUBLESHOOTING PROCEDURES. ALL TROUBLESHOOTING SHOULD BE DONE BY A QUALIFIED PROFESSIONAL.


1) Remove the two screws from the face of the Control Module and remove the front panel.



2) Locate Small Jumper Block

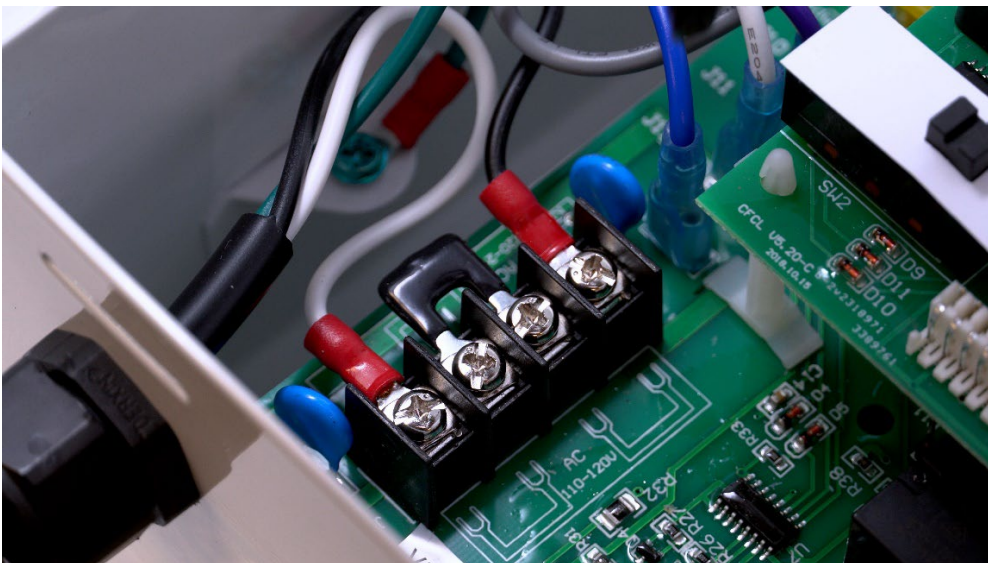


3) Loosen all four screw terminals, remove wires, and remove the existing jumper.

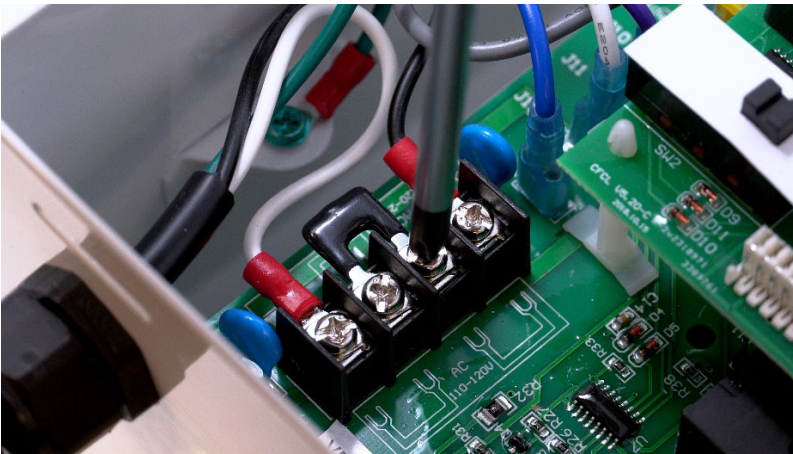

4) Locate the additional JUMPER on the inside of the door.



5) Reattach the wires on top of the provided JUMPER along with the original JUMPER onto the four screw terminals and tighten the screws to secure the jumpers along with the wire.

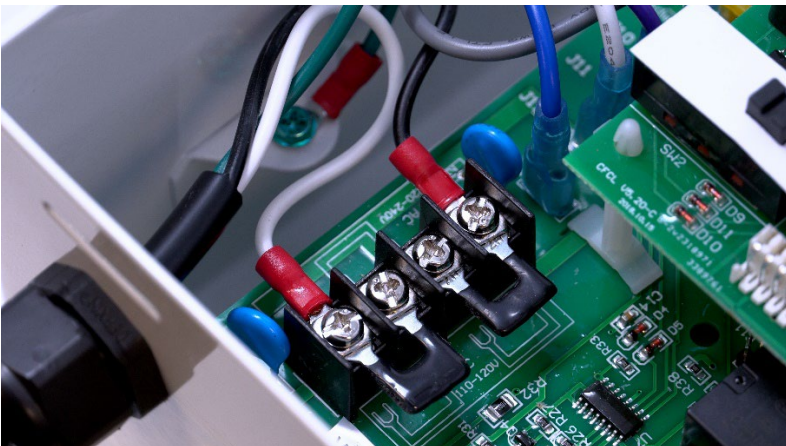

6) Attach the front cover to the control module and fasten the 2 screws from step 1.